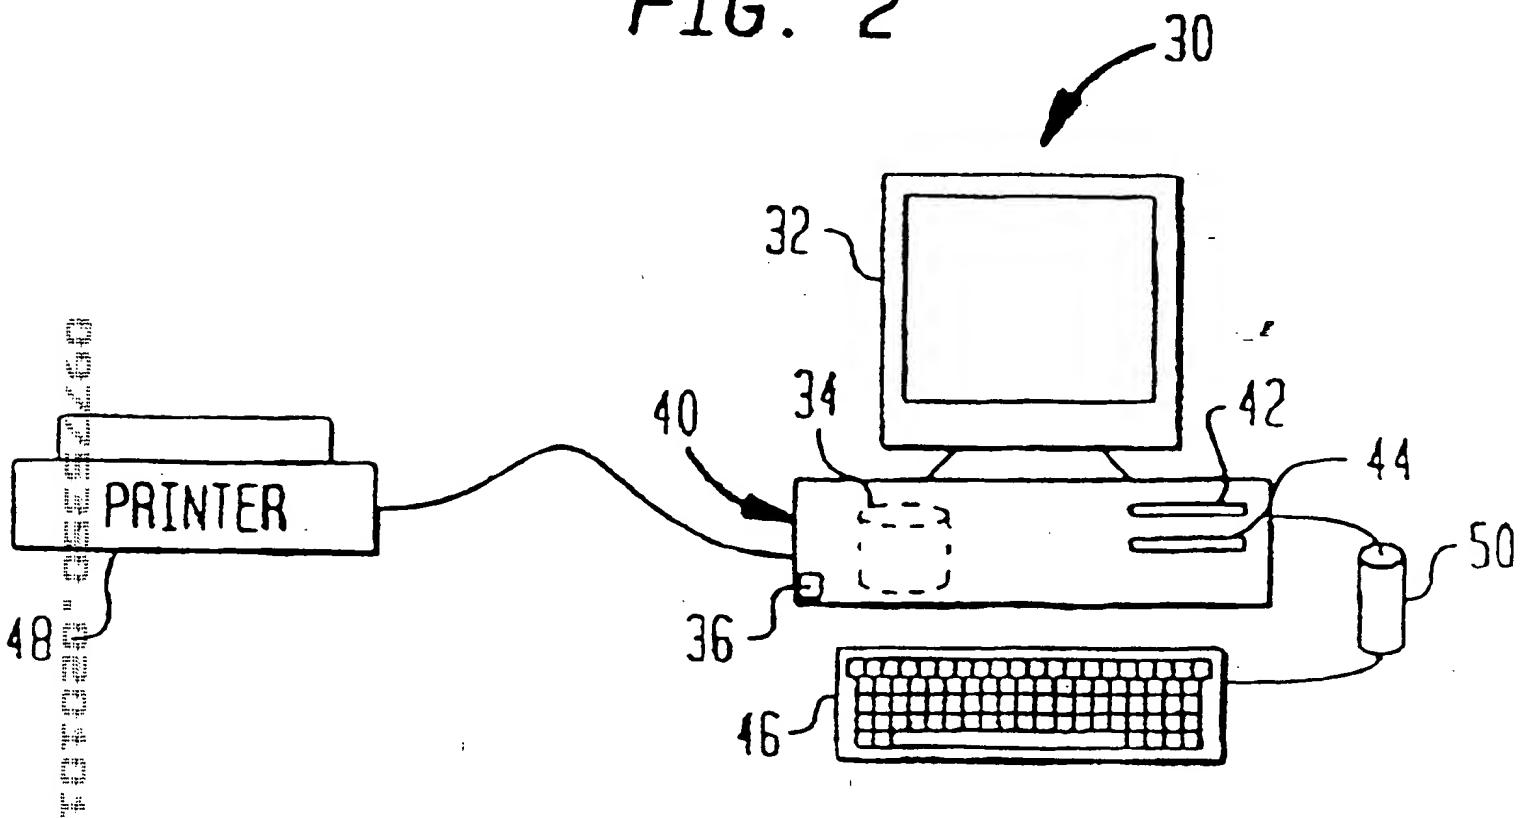
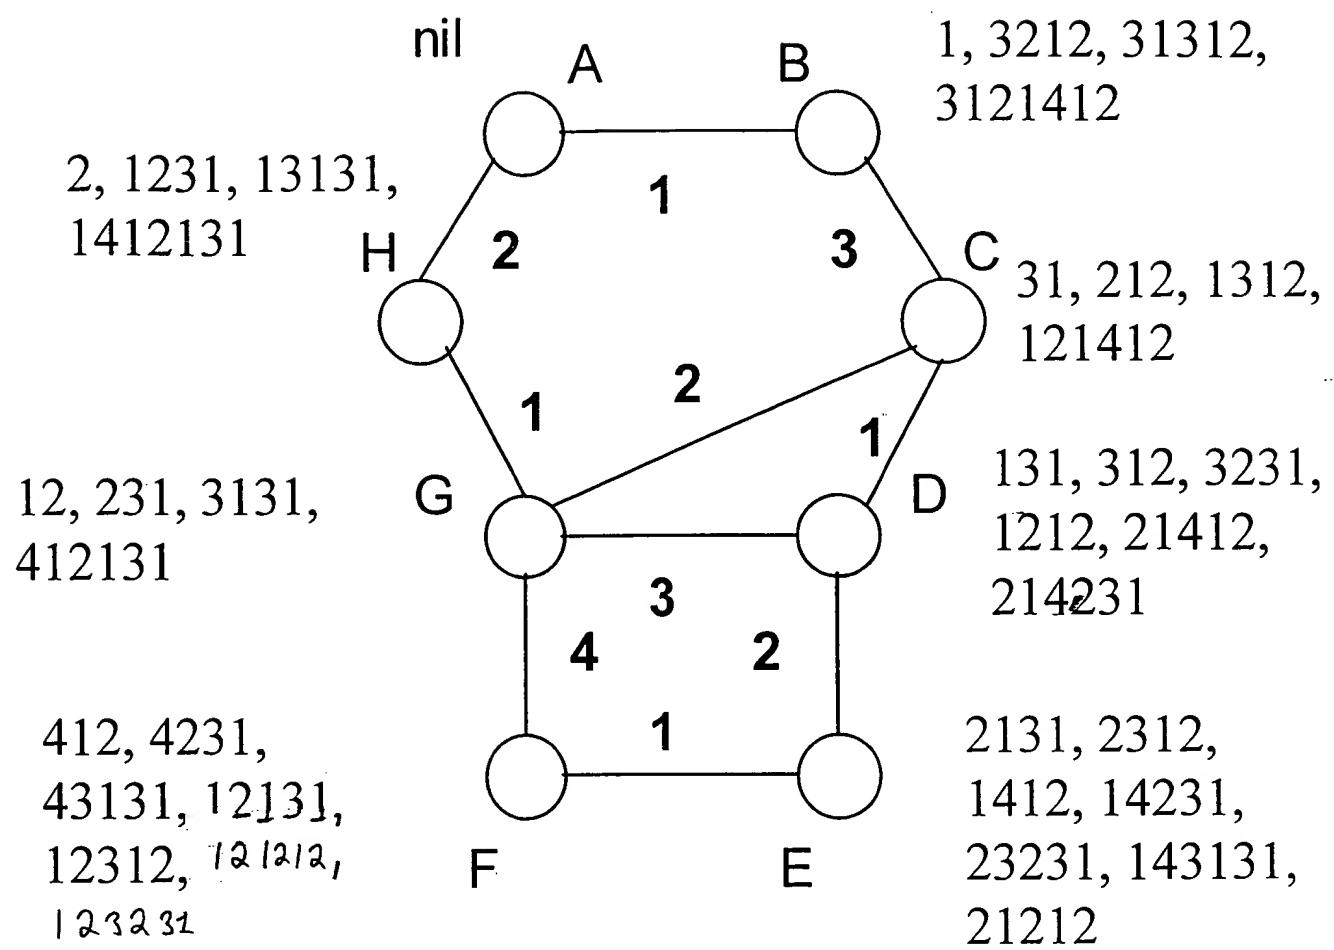


Figure 1

FIG. 2





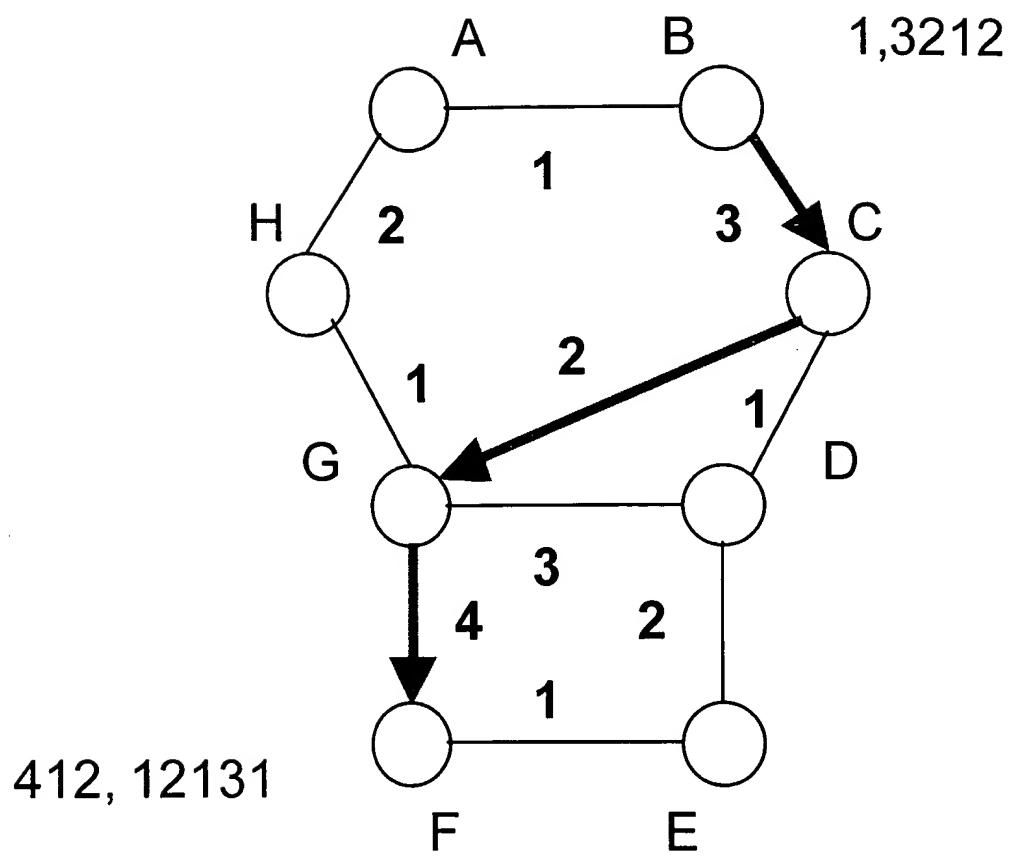


Figure 4: Computing a path from labels

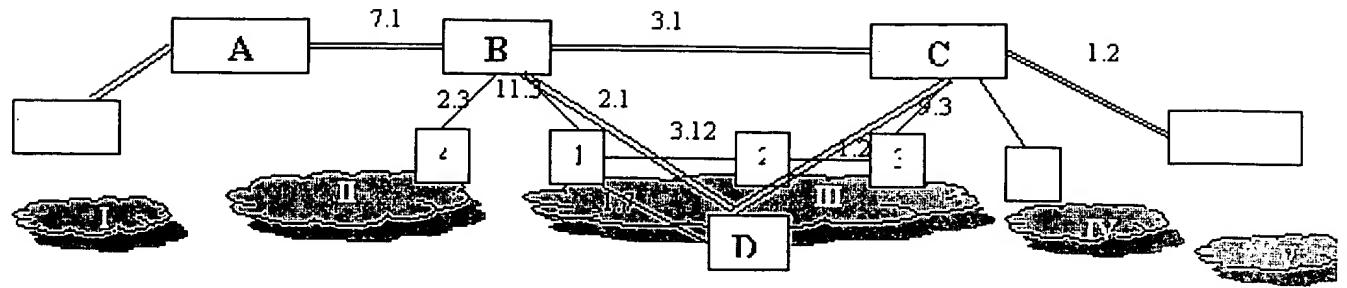


Figure5: A two-layer architecture for global routing

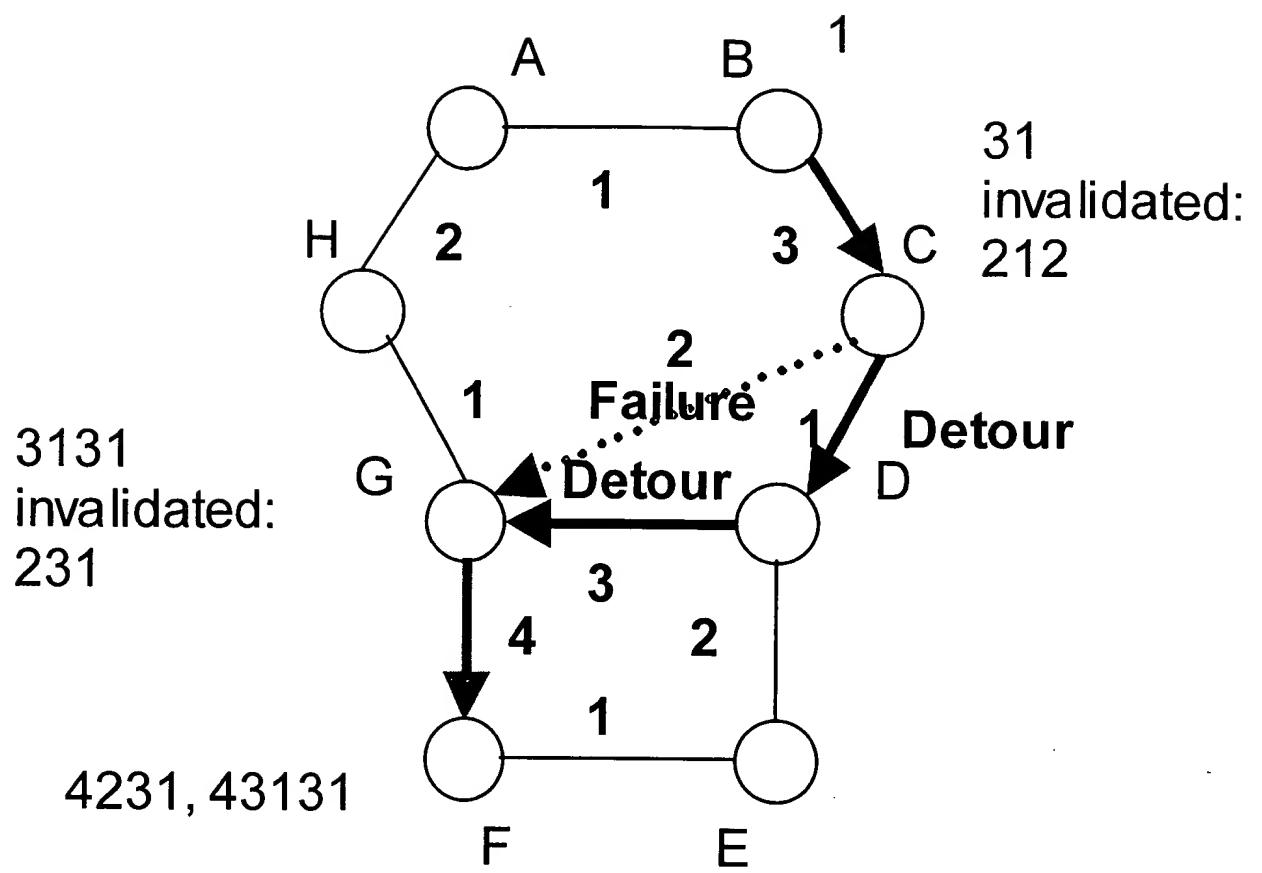


Figure 6: Link failure example

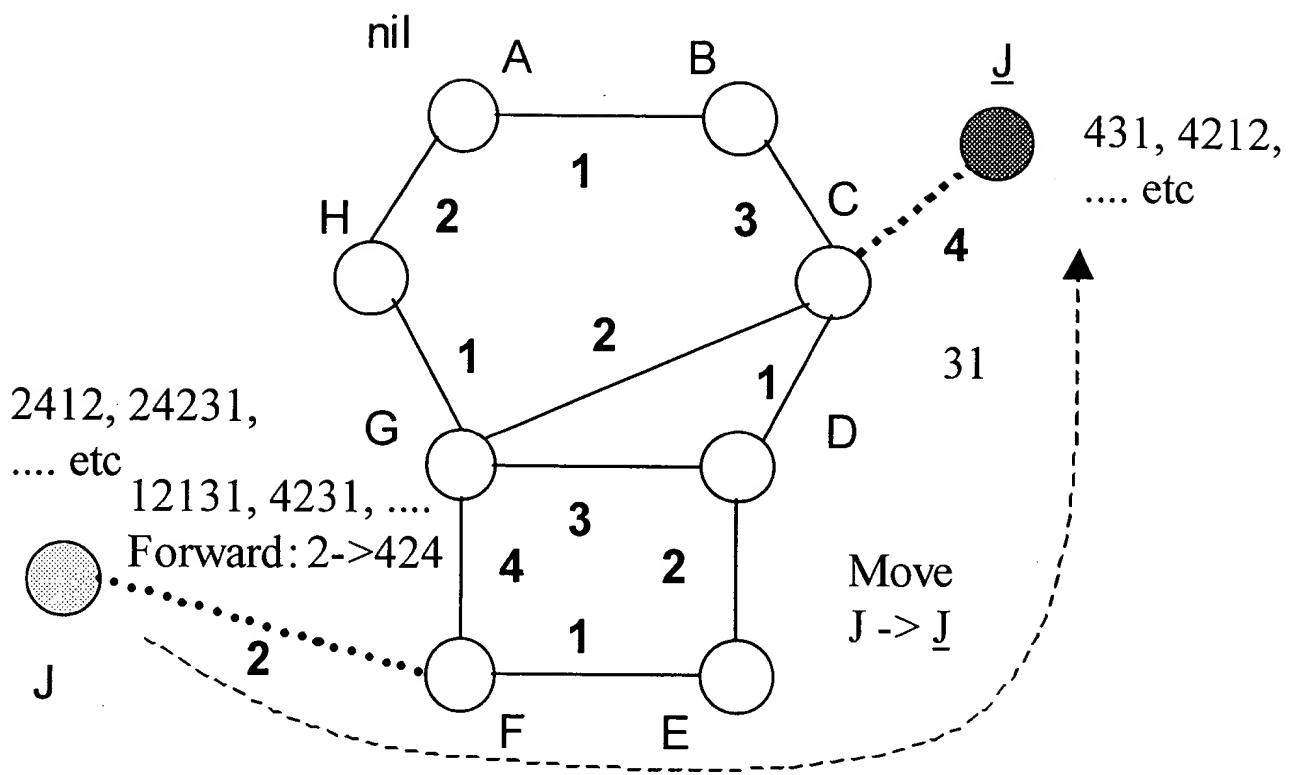


Figure 7: Mobile Nodes in DART

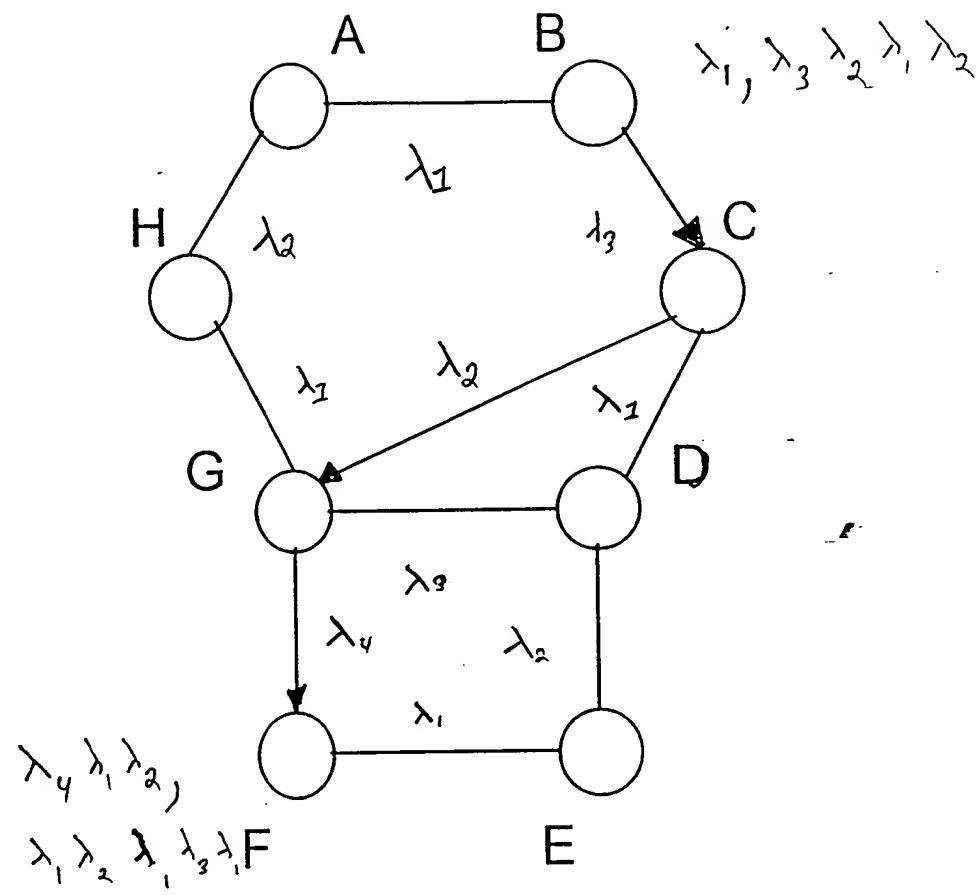


Figure 8

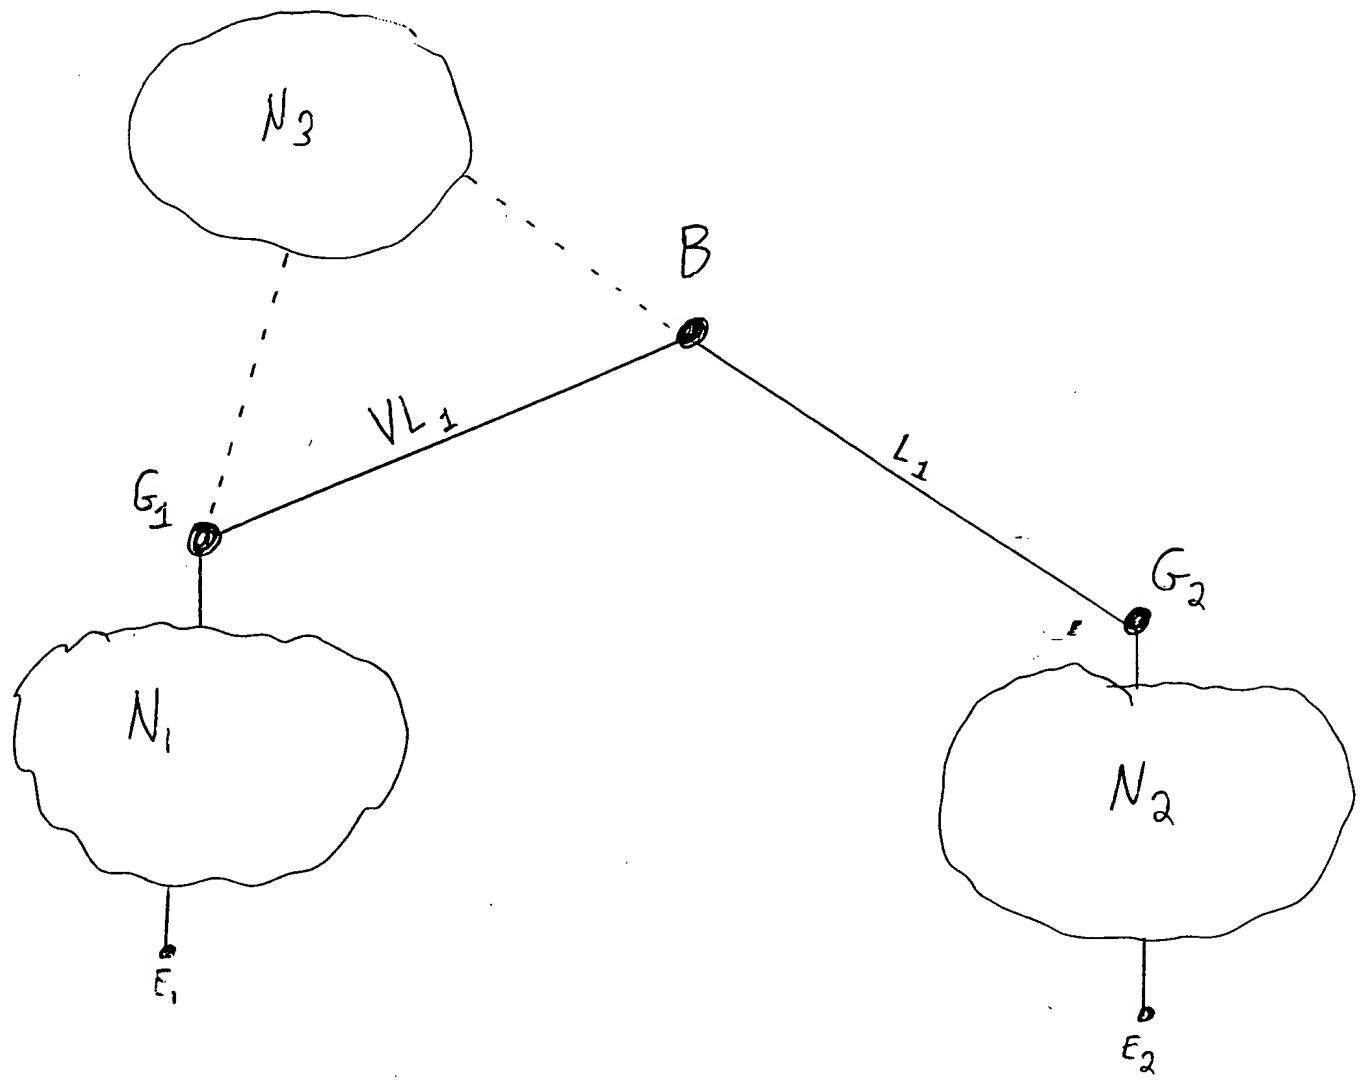


Figure 9

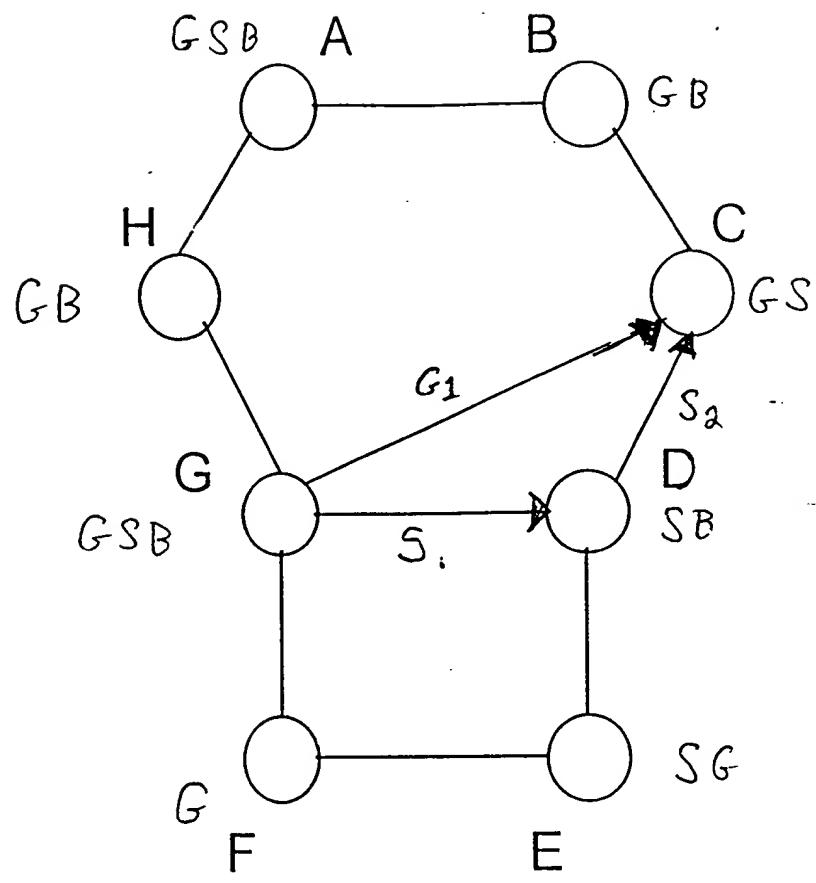


Figure 10